

Circuit No.	Dimensions					
	A	B (A+5.5)	C (A+2.6)	D (A+3.5)	E (A-0.5)	F (A+2.5)
2*40P	19.50	25.00	22.10	23.00	19.00	22.00


Series No. **C 28 0 0 X X -12**

Number of Contact **80 Contact**

MATE WITH C2800XX-13

LTR	Part Name	Material	Description	QTY
1	Housing	LCP UL94V-0	+30%GF Initial : 1000M Ohms Min.	1
2	Contact	Brass C2680	Current Rating : 0.5 A Initial : 30m Ohms Max.	XX
3	Fitting Nail	Brass C2680	Current Rating : 0.5 A Initial : 30m Ohms Max.	2
4	MYLAR	PI		1

Temperature Rating : -40°C ~ +105°C.
Dielectric Withstanding Voltage : 300 V AC/Min

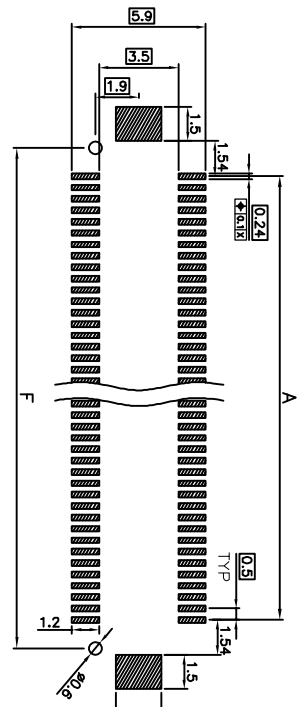

: SOLDER AREA

TOLERANCE: ±0.05,
RECOMMENDED PCB LAYOUT
(TOP VIEW)

THIS DRAWING IS A CONTROLLED DOCUMENT.

DMN 尹婉開 01SEP2023	NAME CHUFON TECH CO., LTD
CHK 楊廣文 01SEP2023	
APVD 林振偉 01SEP2023	
PRODUCT SPEC	
QUALIFICATION TEST REPORT	
WEIGHT	
CUSTOMER DRAWING	

PH0.5 BT0B H2.5 母座

SIZE A3 CASE CODE 00779 DRAWING NO C280000-12

SCALE 1 OF 1 SHEET 1 REV A0