


LTR	Part Name	Material	Description	QTY
1	Housing	LCP UL94V-0	+30%GF 260°C for 10 Seconds. Initial : 1000M Ohms Min.	1
2	Contact	Bronze C5191	Current Rating : 0.5 A Initial : 30m Ohms Max.	XX
3	Fitting Nail	Brass C2680	Current Rating : 0.5 A Initial : 30m Ohms Max.	2

Temperature Rating : -40°C ~ +105°C.  
Dielectric Withstanding Voltage : 300 V AC/Min

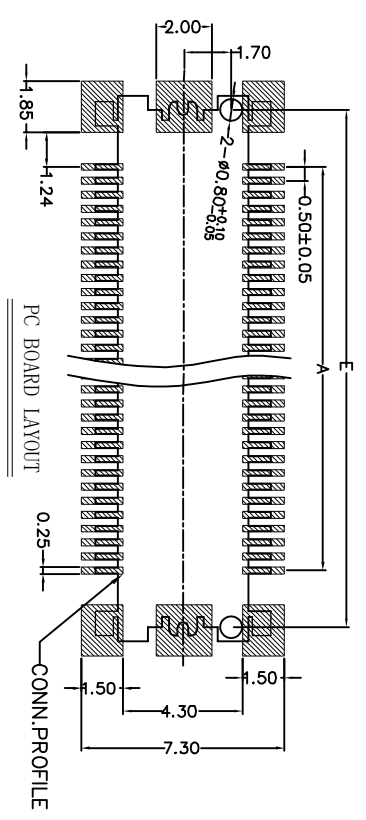

Circuit No.	Dimensions				
	A	B (A+2.3)	C (A+1.65)	D (A+5.1)	E (A+4.1)
2*10P	4.50	6.80	6.15	9.60	8.60
2*15P	7.00	9.30	8.65	12.10	11.10
2*20P	9.50	11.80	11.15	14.60	13.60
2*30P	14.50	16.80	16.15	19.60	18.60

Number of Contact  
20,30,40,60 Contact

Series No.  
MATE WITH C2800XX-01

C 28 0 0 X X -02

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIM	尹晚開	01SEP2023	NAME	CHUFON TECH CO., LTD
CHK	楊廣文	01SEP2023	ADVD	林振偉
PRODUCT SPEC	01SEP2023			
QUALIFICATION TEST REPORT	/			
WEIGHT	/			
CUSTOMER DRAWING	/			

PH0.5 H1.1 BTOB 公座成品

SIZE	DATE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C280000-02	-

SCALE: 1 OF 1 SHEET: 1 REV: A0