


LTR	Part Name	Material	Description	QTY
1	Housing	LCP UL94V-0	+30%GF 260°C for 10 Seconds. Initial : 1000M Ohms Min.	1
2	Contact	Bronze CS191	Current Rating : 0.5 A Initial : 30m Ohms Max.	XX
3	Fitting Nail	Brass C2680	Current Rating : 0.5 A Initial : 30m Ohms Max.	2
4	Mylar	PI		1

Temperature Rating : -40°C ~ +105°C.
Dielectric Withstanding Voltage : 300 V AC/Min

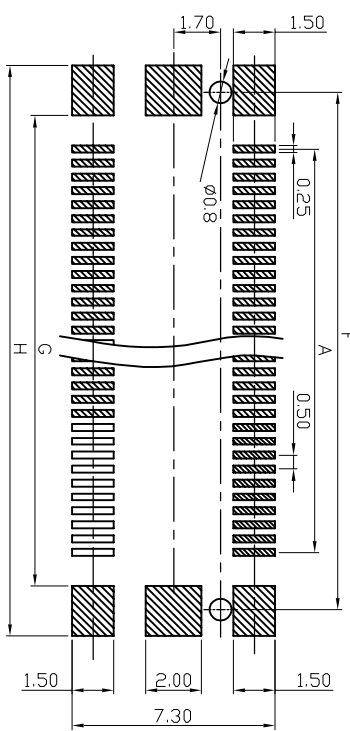

Circuit No.	Dimensions									
	A	B (A+1.5)	C (A+5.0)	D (A+1.0)	E (A+2.3)	F (A+4.1)	G (A+2.4)	H (A+6.0)		
2*4P	1.50	3.15	6.60	2.50	3.80	5.60	3.90	7.50		
2*5P	2.00	3.65	7.10	3.00	4.30	6.10	4.40	8.00		
2*10P	4.50	6.15	9.60	5.50	6.80	8.60	6.90	10.50		
2*30P	14.50	16.15	19.60	15.50	16.80	18.60	16.90	20.50		
2*40P	19.50	21.15	24.60	20.50	21.80	23.60	21.90	25.50		

C 28 0 0 X X -03

Number of Contact
08,10,20,60,80 Contact

Series No.
MATE WITH C2800XX-01
C2800XX-04
C2800XX-06

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
0 P.L.C	± 0.30	0.15 P.L.C	± 0.20
1 P.L.C	± 0.20	0.15 P.L.C	± 0.15
2 P.L.C	± 0.15	0.15 P.L.C	± 0.15
3 P.L.C	± 0.15	0.15 P.L.C	± 0.15
4 P.L.C	± 0.15	0.15 P.L.C	± 0.15

CHUFON TECH CO., LTD

PH0.5 BT0B H1.55 公座成品

APVD 楊廣文 01SEP2023
CHK 尹晚開 01SEP2023
PRODUCT SPEC 林振偉 01SEP2023

SIZE A3
GAGE CODE 100779
DRAWING NO C280000-03

CUSTOMER DRAWING

SCALE 1 OF 1 SHEET REV AO