


LTR	Part Name	Material	Description	QTY
1	Housing	LCP UL94V-0	+30%GF Initial : 1000M Ohms Min.	1
2	Contact	Brass C2680	Current Rating : 0.5 A Initial : 30m Ohms Max.	XX
3	Fitting Nail	Brass C2680	Current Rating : 0.5 A Initial : 30m Ohms Max.	2

Temperature Rating : -40°C ~ +105°C.  
Dielectric Withstanding Voltage : 300 V AC/Min

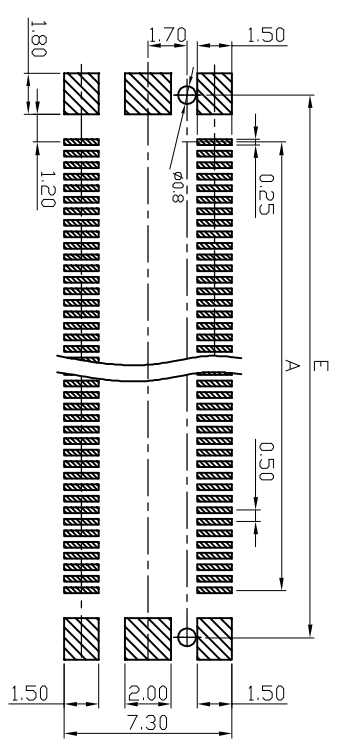

PC BOARD LAYOUT

Circuit No.	Dimensions				
	A	B (A+5.1)	C (A+1.6)	D (A+2.9)	E (A+4.1)
2*40P	19.50	24.60	21.10	22.40	23.60

**C 28 0 0 X X -07**

Series No. **MAATE WITH C2800XX-01**  
C2800XX-04  
C2800XX-06

Number of Contact **80 Contact**

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM	TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 P.L.C	± -
1 P.L.C	± 0.30
2 P.L.C	± 0.20
3 P.L.C	± 0.15
4 ANGLES	± - ±.3°

FINISH: SEE NOTE

MATERIAL: SEE NOTE

DMN	01SEP2023	尹晚開
CHK	01SEP2023	楊廣文
APVD	01SEP2023	林振偉

PRODUCT SPEC: BT0B PH0.5 H2.05 LCP料 斷差型公座

QUALIFICATION TEST REPORT: A300779

WEIGHT: A300779

CUSTOMER DRAWING: A300779

SCALE: —

SHEET: 1 OF 1

REV: A0

CHUFON TECH CO., LTD

RESTRICTED TO