


LTR	Part Name	Material	Description	QTY
1	Housing	LCP +30%玻璃纖維 UL94V-0	260°C for 10 Seconds. Initial : 1000M Ohms Min.	1
2	Contact	Bronze	Current Rating : 0.5 A Initial : 30m Ohms Max.	XX
3	Fitting Nail	Brass C2680	Current Rating : 0.5 A Initial : 30m Ohms Max.	2

Temperature Rating : -40°C ~ +105°C.
Dielectric Withstanding Voltage : 300 V AC/Min

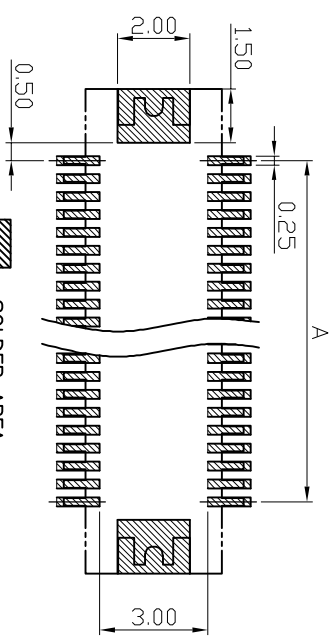


C 28 00 XX-10

Number of Contact
40,50,80 Contact

Series No.
MATE WITH C2800XX-09

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM	TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 P.L.C	± -
1 P.L.C	± 0.30
2 P.L.C	± 0.20
3 P.L.C	± 0.15
ANGLES	± 3'



MATERIAL SEE NOTE

FINISH SEE NOTE

Circuit No.	Dimensions			
	A	B (A+4.0)	C (A+1.0)	D (A+2.0)
2*20P	9.50	13.50	10.50	11.50
2*25P	12.00	16.00	13.00	14.00
2*40P	19.50	23.50	20.50	21.50

DMN 尹晚開 01SEP2023
CHK 楊廣文 01SEP2023
APVD 林振偉 01SEP2023
PRODUCT SPEC
QUALIFICATION TEST REPORT
WEIGHT
CUSTOMER DRAWING

CHUFON TECH CO., LTD

PH0.5 BT0B H1.45 公座

SIZE A3
CASE CODE 00779
DRAWING NO C280000-10
RESTRICTED TO

SCALE — SHEET 1 OF 1 REV A0