



RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05
ONLY GND PATTERN AND VIA HOLE ALLOWED IN THIS AREA.
NO PATTERN AND VIA HOLE IN THIS AREA.

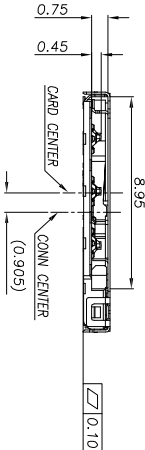

CARD EJECTED	CARD MATED	PIN NO.	NAME	PIN NO.	NAME
⊕ — ⊖ — ⊕	⊕ — ⊖ — ⊕	C1	VCC	C5	GND
⊕ — ⊖ — ⊕	⊕ — ⊖ — ⊕	C2	RST	C6	VPP
⊕ — ⊖ — ⊕	⊕ — ⊖ — ⊕	C3	CLK	C7	I/O

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CURRENT RATING: 1.0A
 - VOLTAGE: 50V DC. MAX.
 - LOW LEVEL CONTACT RESISTANCE: 60 mohms MAX.
 - INSULATION RESISTANCE: 1000Mohms MIN.
- MECHANICAL CHARACTERISTICS:
 - DURABILITY: 5000 CYCLES
 - OPERATION TEMPERATURE RANGE: -20°C~+85°C
- MATERIAL:
 - HOUSING: THERMOPLASTIC, UL 94V-0
 - TERMINAL: PHOSPHOR BRONZE
 - SHELL: STAINLESS STEEL
- FINISHED:
 - TERMINAL: NI PLATED UNDER, 3U" AU MIN PLATED ON CONTACT AREA, AU PLATED ON SOLDER TAIL
 - SHELL: NI PLATED UNDER, G/F PLATED ON SOLDER TAIL

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
0 P.L.C.	± .5	1 P.L.C.	± 0.30
1 P.L.C.	± 0.20	2 P.L.C.	± 0.15
3 P.L.C.	± .5	4 P.L.C.	± .5
FINISH ANGLES		SEE NOTE	
MATERIAL		SEE NOTE	
WEIGHT		CUSTOMER DRAWING	
CHUFON TECH CO., LTD			
NANO SIM CARD PUSH PUSH CONNECTOR			
SIZE	PAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C090358	—
SCALE	SHEET	REV	AO
—	1 of 1	—	AO