


C-TEK D-SUB R/A COMBO 25F/9M/HD15F

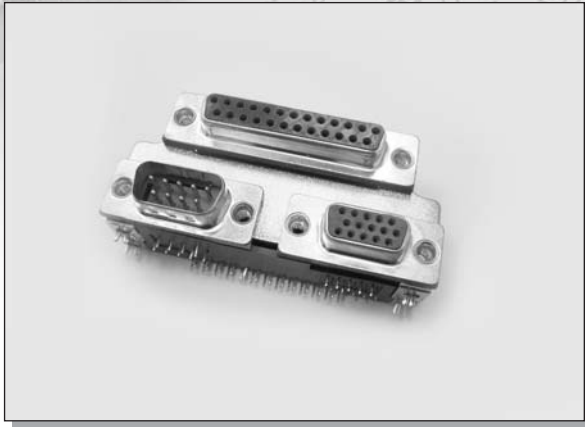






MATERIAL:

INSULATOR : PBT + 30% GLASS FIBER (UL94V-0).
 CONTACT : PHOSPHOR BRONZE OR BRASS.
 (STANDARD IS BRASS)

ELECTRICAL CHARACTERISTICS:

CURRENT RATING : 5 AMPS.
 WITHSTANDING VOLTAGE : AC 1250V R.M.S.
 INSULATOR RESISTANCE : 5000 MEGOHMS MIN. AT 500V DC.
 CONTACT RESISTANCE : 15 MILLIOHMS MAX.
 OPERATING TEMPERATURE : -55°C ~ +105°C

DIMENSIONS

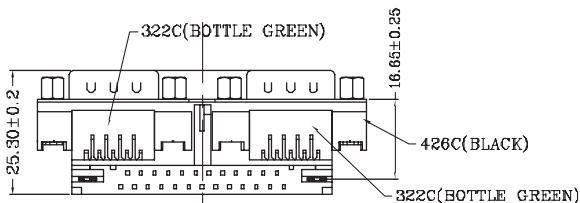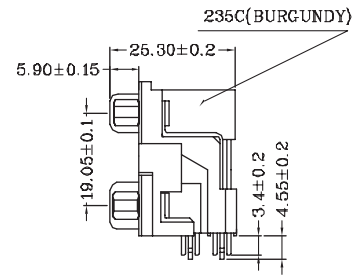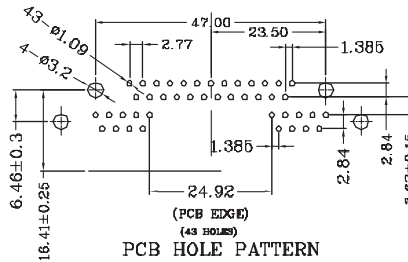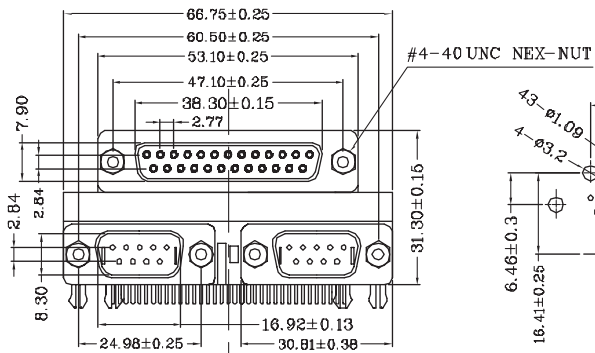

HOW TO ORDER

| SERIES NO. | CONTACT NO. | PLATING | RIVET & HEX SCREW | HOUSING MATERIAL | SCREW TYPE |
|-------------|---|--------------------------|---|-------------------------|--|
| 1015 | 1 | S | 1 | P | 1 |
| | 1: 25F (TOP) + 9M (BOTTOM-LEFT) + H.D. 15F (BOTTOM-RIGHT) | S: SELECTIVE GOLD PLATED | 1: 4-40" INSERT/CAPTIVE NUT WITH FEMALE 4-40" HEX SL WITH BL 2: 4-40" INSERT/CAPTIVE NUT ATTACH FEMALE 4-40" HEX SL WITH BL 3: 4-40" INSERT/CAPTIVE NUT WITH BL | P: PBT H: HIGH TEMP. | 1: NUT: 4.8MM TOTAL LENGTH: 11.8MM 2: NUT: 4.8MM TOTAL LENGTH: 13MM 3: NUT: 5.8MM TOTAL LENGTH: 13MM |