


C-TEK DVI PCB FEMALE R/A DIP TYPE

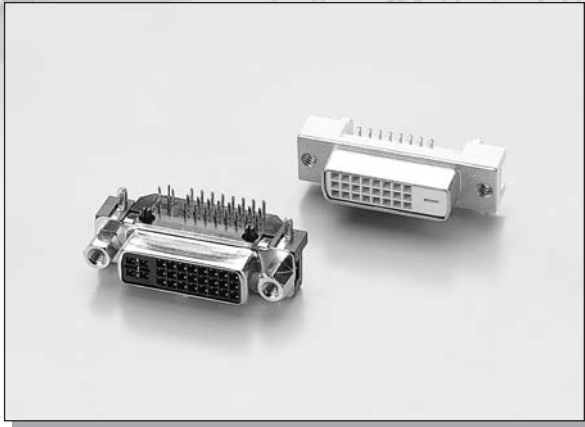





MATERIAL:

INSULATOR : PBT + 30% GLASS FIBER (UL94V-0).
 CONTACT : PHOSPHOR BRONZE OR BRASS.
 (STANDARD IS BRASS)

ELECTRICAL CHARACTERISTICS:

CURRENT RATING : 5 AMPS.
 WITHSTANDING VOLTAGE : AC 1250V R.M.S.
 INSULATOR RESISTANCE : 5000 MEGOHMS MIN. AT 500V DC.
 CONTACT RESISTANCE : 15 MILLIOHMS MAX.
 OPERATING TEMPERATURE : -55°C ~ +105°C

DIMENSIONS

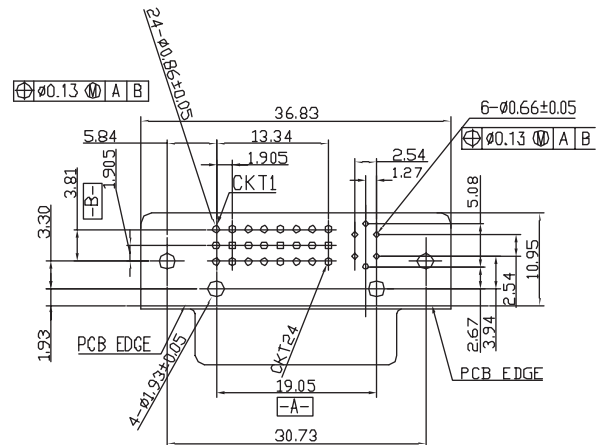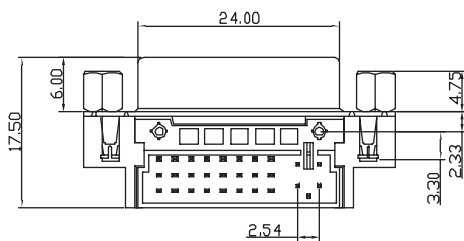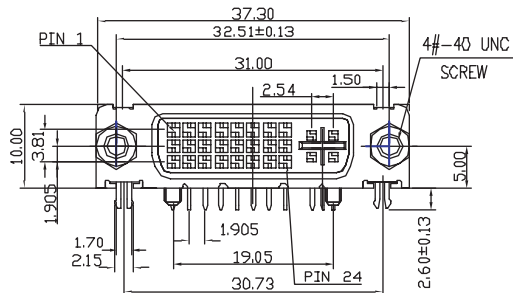

RECOMMENDED PCB LAYOUT

HOW TO ORDER

SERIES NO.	CONTACT NO.	CONTACT TYPE	PLATING	MOUNTING OPTION	COLOR	HOUSING MATERIAL	REAR SHELL
1017	24 24 29	F F: FEMALE	S S: SELECTIVE GOLD PLATED	S 1: 4-40" UNC THREADED INSERT 2: 4-40" UNC HEX SCREWLOCK	B B: BLACK W: WHITE	P P: PBT H: HIGH TEMP.	1 1: W/O SHELL 2: W/SHELL