


C-TEK 2.54MM PITCH MOLEX WIRE TO BOARD

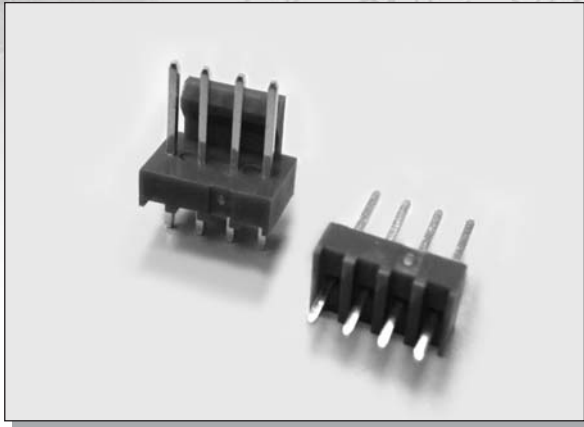

MATERIAL:

INSULATOR : NYLON-66.

CONTACT : BRASS.

ELECTRICAL CHARACTERISTIC:

CURRENT RATING : 3A AC / DC.


VOLTAGE RATING : 250V AC / DC.

INSULATION RESISTANCE : 1000 MEGOHMS MIN.

WITHSTANDING VOLTAGE : 800V AC / MINUTE.

OPERATING TEMPERATURE : -25°C TO 85°C

DIMENSIONS

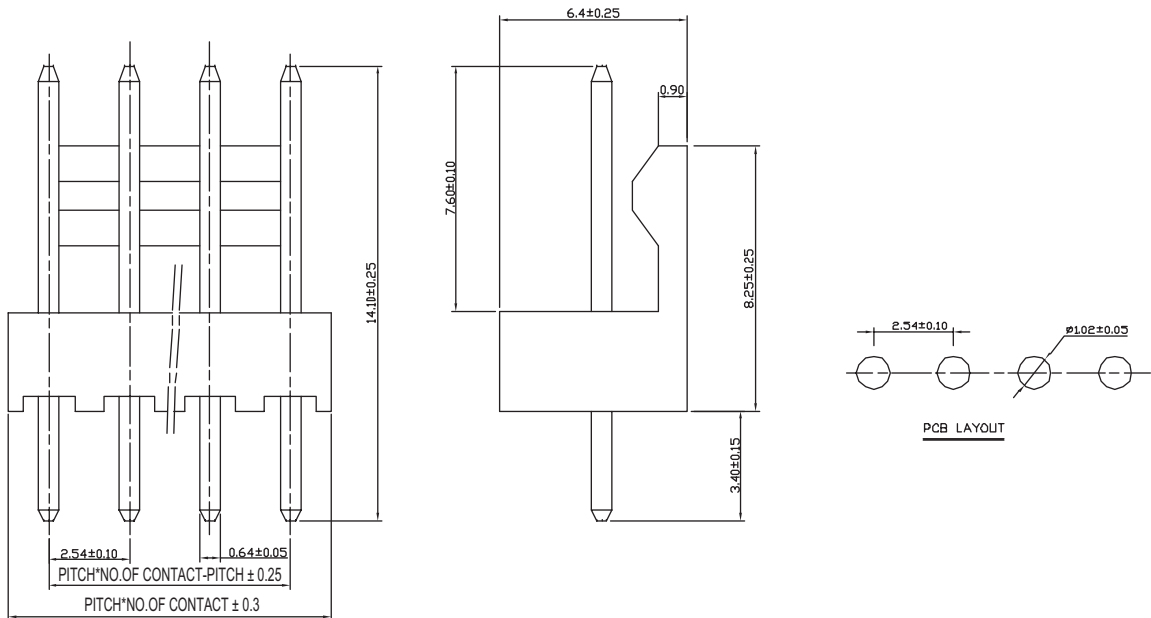

HOW TO ORDER

HOUSING

TERMINAL

SERIES NO.	CONTACT NO.	CONTACT TYPE	PLATING	SERIES NO.	CONTACT NO.	SERIES NO.	PLATING
3008	12	R	T	3008A	12	3008A	T
	2 - 15	R: R/A (STANDARD TYPE) R1: R/A (SPECIAL TYPE) S: STRAIGHT	T: TIN PLATED		2 - 15		T: TIN PLATED