


# C-TEK 2.50MM PITCH JST XH WIRE TO BOARD

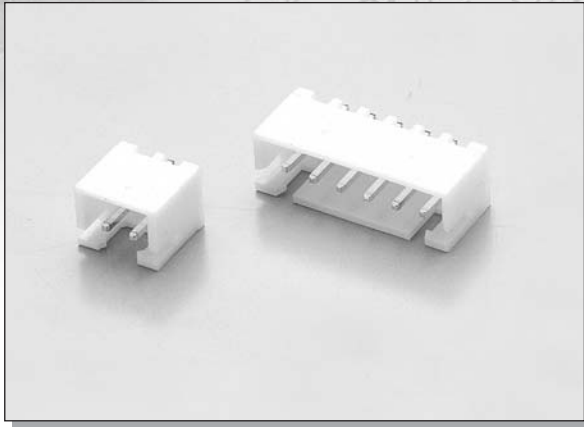

## MATERIAL:


INSULATOR : NYLON 66 UL 94V-0.  
CONTACT : PHOSPHOR BRONZE.

## ELECTRICAL CHARACTERISTICS:


CURRENT RATING : 2 AMPS.  
WITHSTANDING VOLTAGE : 750V AC MIN.  
INSULATOR RESISTANCE : 1000 MEGOHMS MIN. AT 500V DC.  
CONTACT RESISTANCE : 30 MILLIOHMS MAX.  
OPERATING TEMPERATURE: -25°C ~ +85°C

## DIMENSIONS

STRAIGHT

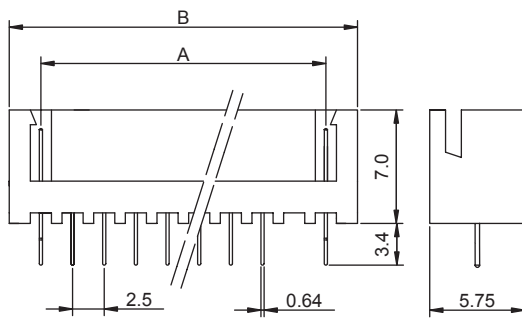

RIGHT ANGLE

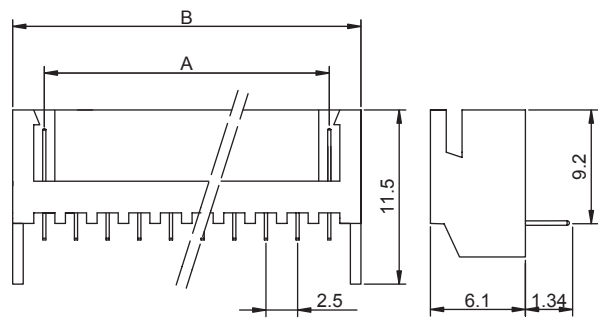

## DIMENSIONS

A=2.50 x (No. of Position-1)  
B=2.50 x (No. of Position+1)

## HOW TO ORDER

### HOUSING

### TERMINAL

SERIES NO.	CONTACT NO.	CONTACT TYPE	PLATING	SERIES NO.	CONTACT NO.	SERIES NO.	PLATING
3010	12 2-20	R R: R/A S: STRAIGHT	T T: TIN PLATED	3010A	12 2-20	3010A	T T: TIN PLATED