


# C-TEK 2.50MM PITCH MOLEX WIRE TO BOARD

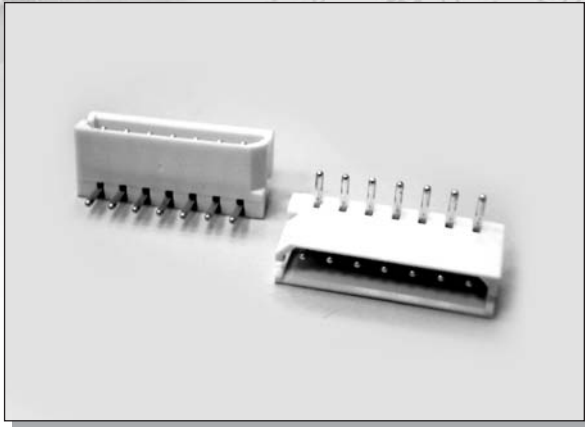


## MATERIAL:

INSULATOR : NYLON 66 UL 94V-0.  
 CONTACT : PHOSPHOR BRONZE OR BRASS.  
 (STANDARD IS BRASS)

## ELECTRICAL CHARACTERISTICS:

CURRENT RATING : 3 AMPS.  
 WITHSTANDING VOLTAGE : AC 1250V R.M.S.  
 INSULATOR RESISTANCE : 5000 MEGOHMS MIN. AT 500V DC.  
 CONTACT RESISTANCE : 15 MILLIOHMS MAX.  
 OPERATING TEMPERATURE : -55°C ~ +105°C

## DIMENSIONS

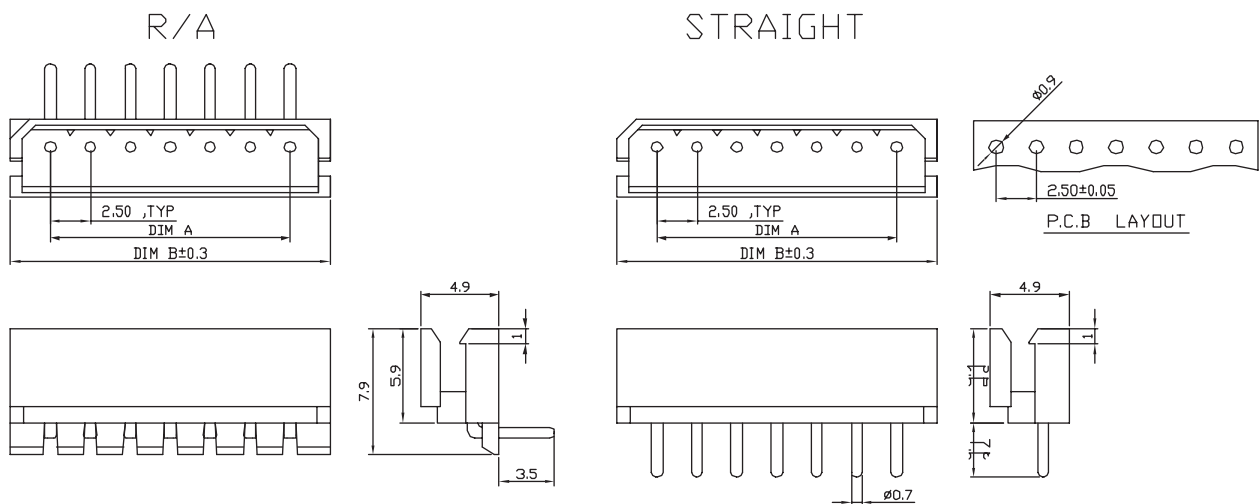

## HOW TO ORDER

### HOUSING

### TERMINAL

SERIES NO.	CONTACT NO.	CONTACT TYPE	PLATING	SERIES NO.	CONTACT NO.	SERIES NO.	PLATING
3011	2	R	T	3011A	12	3011A	T
	2 - 20	R: R/A DIP S: STRAIGHT DIP	T: TIN PLATED		2 - 20		T: TIN PLATED