


# C-TEK 1.50MM PITCH JST ZH WIRE TO BOARD

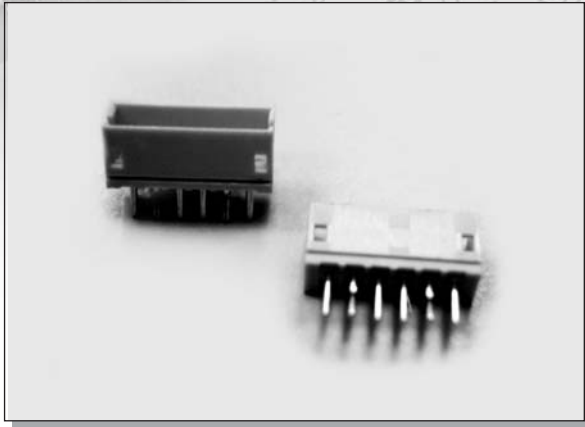



## MATERIAL:

INSULATOR : NYLON 66 UL94-V0.  
 CONTACT : PHOSPHOR BRONZE OR BRASS.  
 (STANDARD IS BRASS)



## ELECTRICAL CHARACTERISTICS:

CURRENT RATING : 1 AMP.  
 WITHSTANDING VOLTAGE : AC 1250V R.M.S.  
 INSULATOR RESISTANCE : 5000 MEGOHMS MIN. AT 500V DC.  
 CONTACT RESISTANCE : 15 MILLIOHMS MAX.  
 OPERATING TEMPERATURE : -55°C ~ +105°C

## DIMENSIONS

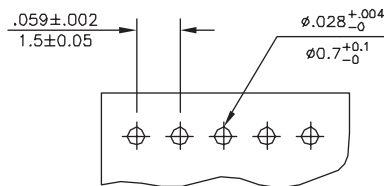

P.C. Board Layout

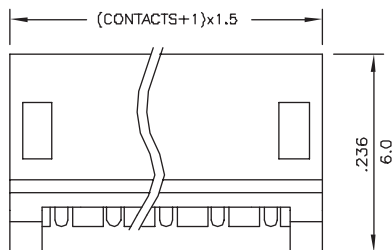

## HOW TO ORDER

### HOUSING

### TERMINAL

SERIES NO.	CONTACT NO.	CONTACT TYPE	PLATING	SERIES NO.	CONTACT NO.	SERIES NO.	PLATING
3015	12 2 - 13	R R: R/A S: STRAIGHT	T T: TIN PLATED	3015A	12 2 - 13	3015A	T T: TIN PLATED