C-TEK D-SUB 9M/15F + 3 AUDIO JACK

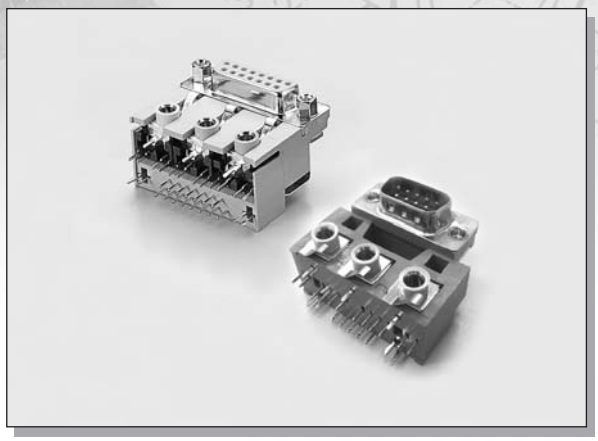

MATERIAL:

INSULATOR : PBT.
CONTACT : BRASS.

ELECTRICAL CHARACTERISTICS:

CURRENT RATING : 5A.
WITHSTANDING VOLTAGE : AC 1250V R.M.S.
INSULATOR RESISTANCE : 5000 MEGOHMS MIN. AT 500V DC.
CONTACT RESISTANCE : 15 MILLIOHMS MAX.
OPERATING TEMPERATURE : -55°C ~ 105°C

DIMENSIONS

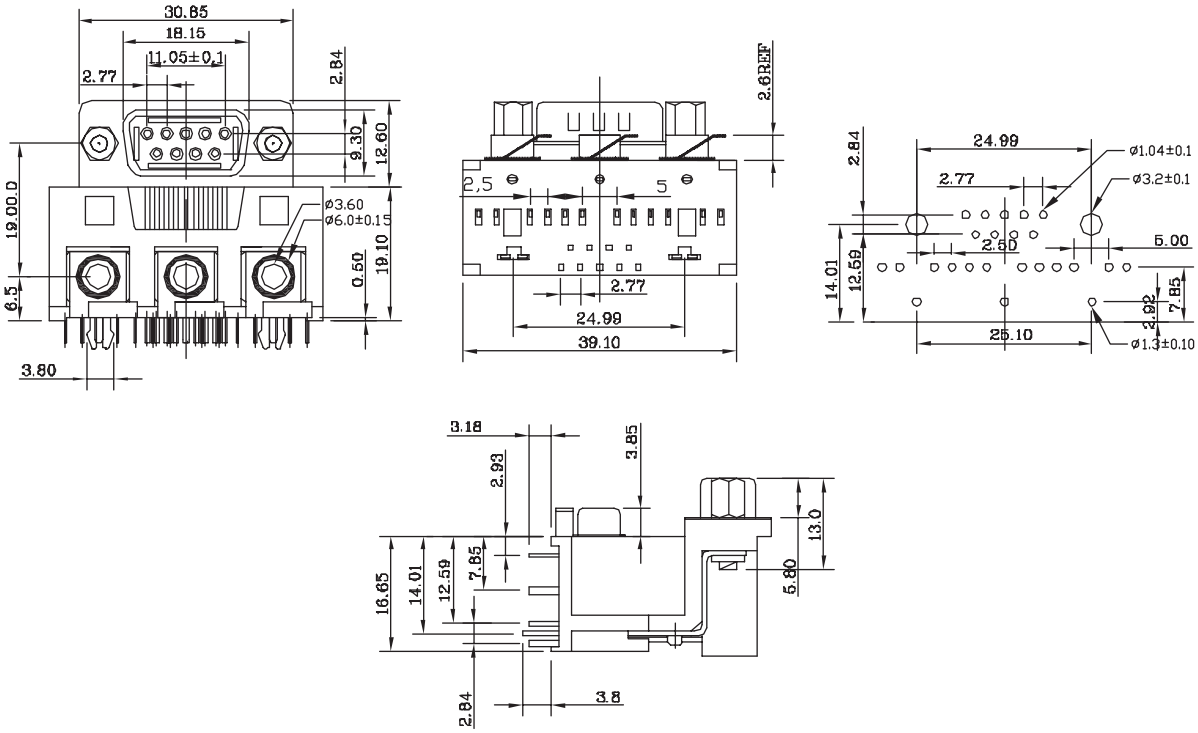

HOW TO ORDER

SERIES NO.	CONTACT NO.	PLATING	RIVET & HEX SCREW	COLOR	SCREW TYPE	HOUSING MATERIAL
1004	1	S	1	Y	1	P
	1: 15F + 3 PCs JACK 2: 9M + 3 PCs JACK	S: SELECTIVE GOLD PLATED	1: 4-40" INSERT/CAPTIVE NUT WITH FEMALE 4-40" HEX SL WITH BL 2: 4-40" INSERT/CAPTIVE NUT ATTACH FEMALE 4-40" HEX SL WITH BL 3: 4-40" INSERT/CAPTIVE NUT WITH BL	Y: YELLOW G: GREEN	1: NUT: 4.8MM TOTAL LENGTH: 11.8MM 2: NUT: 4.8MM TOTAL LENGTH: 13MM 3: NUT: 5.8MM TOTAL LENGTH: 13MM	P: PBT H: HIGH TEMP