


# C-TEK 1.00MM PITCH WIRE TO BOARD SMT TYPE (DUAL)

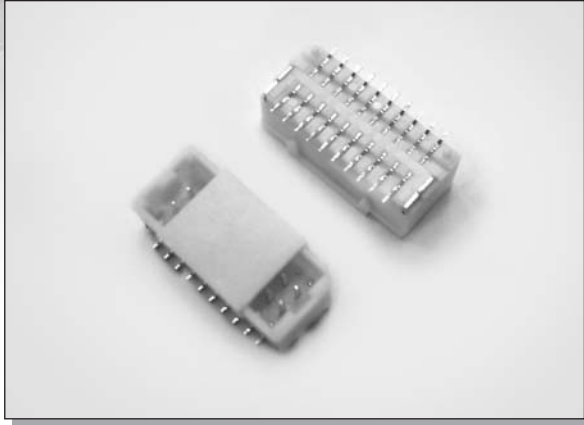



## MATERIAL:

INSULATOR : NYLON.  
CONTACT : PHOSPHOR BRONZE.



## ELECTRICAL CHARACTERISTICS:

CURRENT RATING : 1 AMP.  
WITHSTANDING VOLTAGE : 500V AC / MINUTE.  
INSULATOR RESISTANCE : 100 MEGOHMS MIN.  
CONTACT RESISTANCE : 20 MILLIOHMS MAX.  
OPERATING TEMPERATURE : -25°C ~ +85°C

## DIMENSIONS

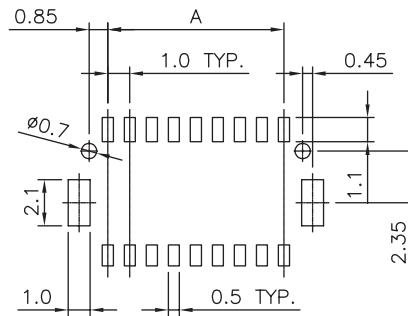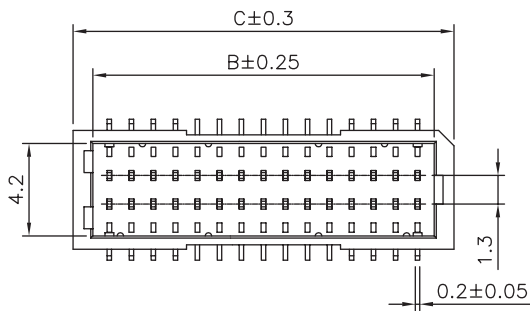

Recommend PCB Layout  
Tolerance=±0.05mm

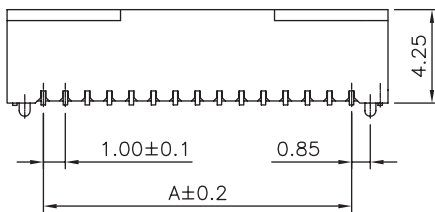

Poles	Dimensions(mm)		
	A	B	C
20	9.00	10.50	12.30
30	14.00	15.50	17.30
40	19.00	20.50	22.30
50	24.00	25.50	27.30

## HOW TO ORDER

SERIES NO.

3018

CONTACT NO.

20

20 30 40 50

CONTACT TYPE

M1

M1: R/A SMT  
M2: STRAIGHT SMT

PLATING

T

T: TIN PLATED

PACKAGE

T

T: TUBE  
R: T&R