


C-TEK PLCC SOCKET THROUGH HOLE TYPE

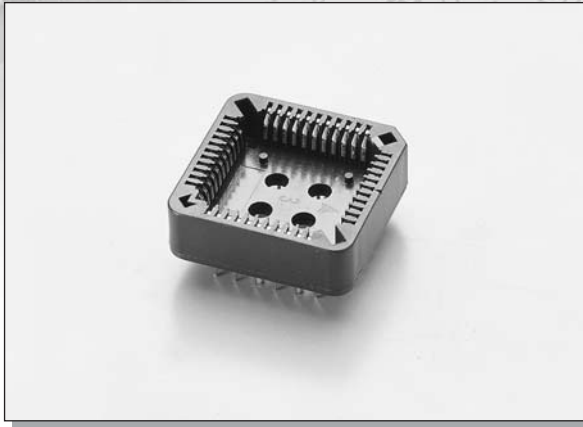

MATERIAL:

INSULATOR : PBT + 40% GLASS FIBER (UL94V-0).

CONTACT : PHOSPHOR BRONZE.

ELECTRICAL CHARACTERISTICS:

CURRENT RATING : 1 AMP.


WITHSTANDING VOLTAGE : AC 500V FOR 1 MINUTE.

INSULATOR RESISTANCE : 1000 MEGOHMS MIN. AT DC 500V.



CONTACT RESISTANCE : 30 MILLIOHMS MAX.

OPERATING TEMPERATURE : -55°C ~ +105°C

DIMENSIONS

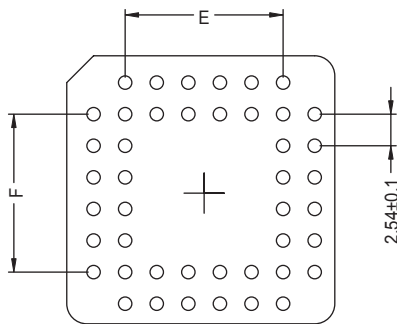

RENOMMENDED P.C.B PAD LAYOUT

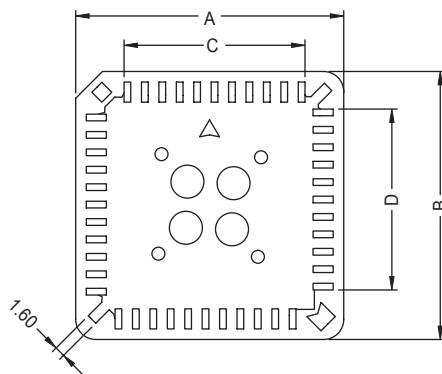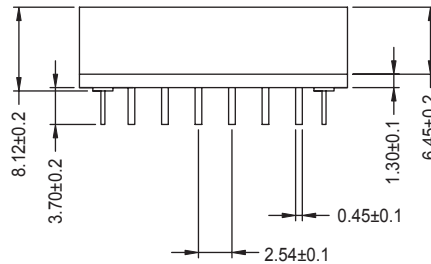

CONTACT	A±0.2	B±0.2	C±0.2	D±0.2	E±0.2	F±0.2
20 PPS/PBT	15.50	15.50	5.08	5.08	5.08	5.08
28 PPS/PBT	18.04	18.04	7.62	7.62	7.62	7.62
32 PPS/PBT	18.04	20.60	7.62	10.16	7.62	10.16
44 PPS/PBT	23.84	23.48	12.7	12.7	12.7	12.7
52 PPS/PBT	25.88	25.88	15.24	15.24	15.24	15.24
68 PPS	31.04	31.04	20.32	20.32	20.32	20.32
84 PPS	36.04	36.04	25.40	25.40	25.40	25.40
68 PBT	31.66	31.66	20.32	20.32	20.32	20.32
84 PBT	36.66	36.66	25.40	25.40	25.40	25.40

HOW TO ORDER

SERIES NO.	CONTACT NO.	PLATING	MATERIAL	PACKAGE
4001	32	T	P	T
	20 28 32 44 52 68 84	T: TIN PLATED G: GOLD 3u"	P: PPS BROWN COLOR B: PBT BLACK COLOR	T: TUBE