


C-TEK 2.00MM PITCH FEMALE HEADER

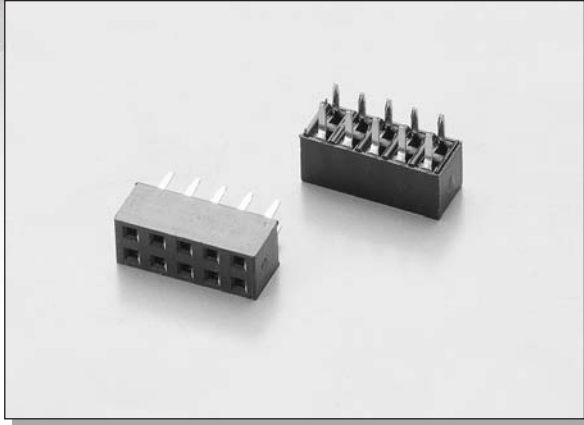




MATERIAL:

INSULATOR : PBT + 30% GLASS FIBER,
UL 94V-0 RATED.
CONTACT : PHOSPHOR BRONZE OR BRASS.
(STANDARD IS BRASS)


ELECTRICAL CHARACTERISTICS:

CURRENT RATING : 1 AMP.
WITHSTANDING VOLTAGE : AC 750V R.M.S.
INSULATOR RESISTANCE : 5000 MEGOHMS MIN.
CONTACT RESISTANCE : 20 MILLIOHMS MAX.
OPERATING TEMPERATURE : -55°C ~ +105°C

DIMENSIONS

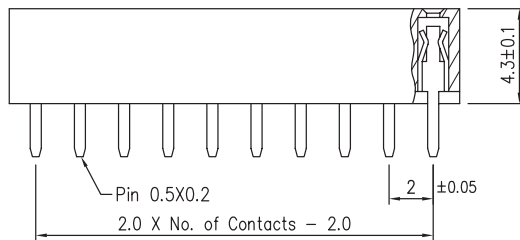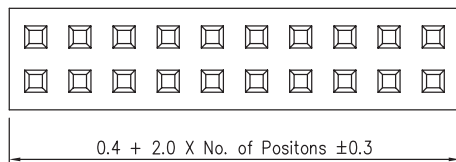

Recommended
P.C. Board
Hole Layout



DIMENSIONS

A=2.0 x No. of Positions+0.6
B=2.0 x (No. of Position-1)

HOW TO ORDER

SERIES NO.	CONTACT NO.	CONTACT TYPE	PLATING	HOUSING MATERIAL	HOUSING PROFILE
5004	2 x 6 1 x 2P ~ 1 x 40P 2 x 2P ~ 2 x 40P	R R: R/A S: STRAIGHT M: SMT	G G: GOLD PLATED	P P: PBT H: HIGH TEMP.	1 1: 2.7MM 2: 4.3MM 3: 6.35MM 4: 7.1MM