

C-TEK SCART CONNECTOR SINGLE PORT W/O SCREW HOLE



MATERIAL:

HOUSING : PC UL94V-0.

CONTACT : BRASS.

ELECTRICAL CHARACTERISTICS:

WITHSTAND VOLTAGE : AC 500V (50HZ) MIN.


CURRENT RATING : AC 50 0.2A.

CONTACT RESISTANCE : 0.02 OHM MAX.

INSULATION RESISTANCE : 100M OHM MIN.

OPERATING TEMPERATURE : 25°C TO +70°C

DIMENSIONS

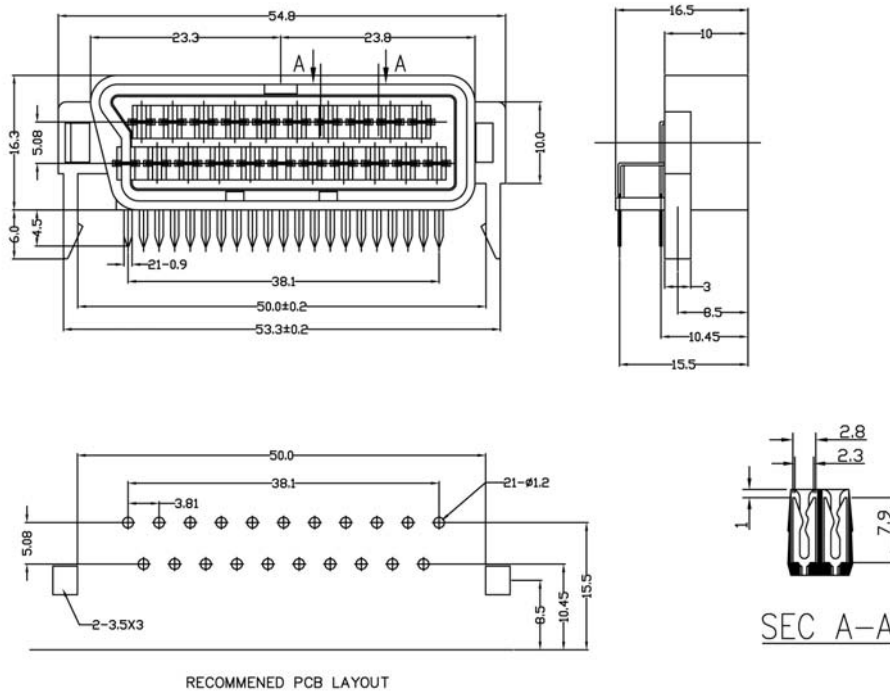

HOW TO ORDER

| SERIES NO. | TYPE | SHELL | PLATING | SCREW HOLE |
|------------|----------------|--|---------------|-------------------|
| 7004 | S | 1 | T | 1 |
| | S: SINGLE PORT | 1: W/O METAL SHELL 2: W/METAL SHELL | T: TIN PLATED | 1: W/O SCREW HOLE |