

C-TEK SCART CONNECTOR DUAL PORT




MATERIAL:

INSULATOR : ABS.
CONTACT : BRASS.

ELECTRICAL CHARACTERISTICS:

WITHSTAND VOLTAGE : AC 500V (50HZ) MIN.
CURRENT RATING : AC 50 0.2A.
CONTACT RESISTANCE : 0.02 OHM MAX.
INSULATION RESISTANCE : 100M OHM MIN.
OPERATING TEMPERATURE : 25°C TO +70°C

DIMENSIONS

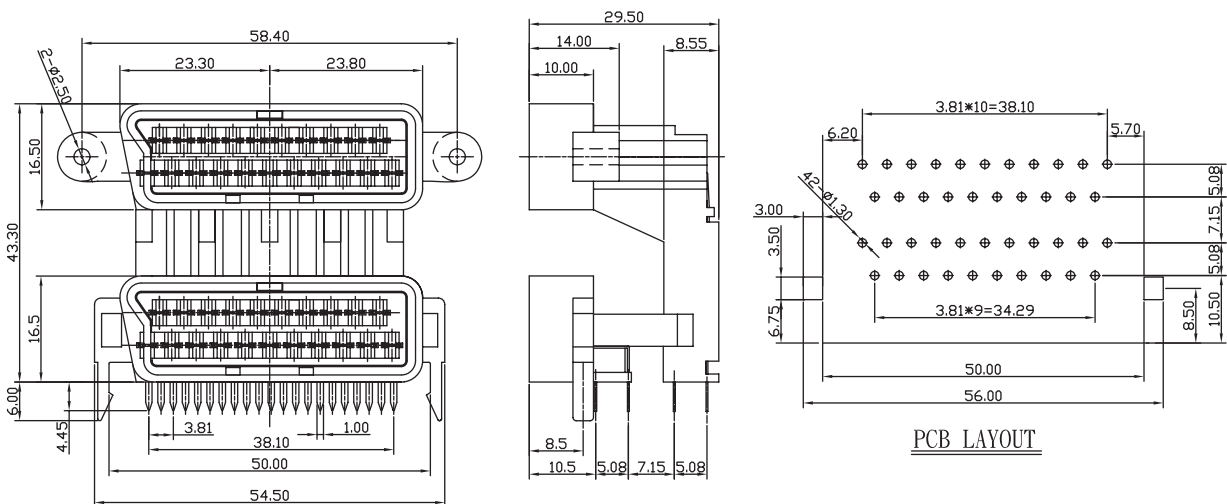

HOW TO ORDER

SERIES NO.	TYPE	SHELL	PLATING
7005	D	1	T
	S: SINGLE PORT	1: W/O METAL SHELL	T: TIN PLATED