

# C-TEK T-FLASH 8P / 9P





## MATERIAL:

HOUSING : THERMOPLASTIC (UL 94V-0).  
CONTACT : PHOSPHOR BRONZE.

## SPECIFICATION:

VOLTAGE RATING : 50V DC MAX.  
CURRENT RATING : 0.5A MAX.  
OPERATING TEMPERATURE : -20°C ~ +80°C  
INSULATION RESISTANCE : 1000 MΩ MIN.  
CONTACT RESISTANCE : 100 MΩ MAX.

## DIMENSIONS

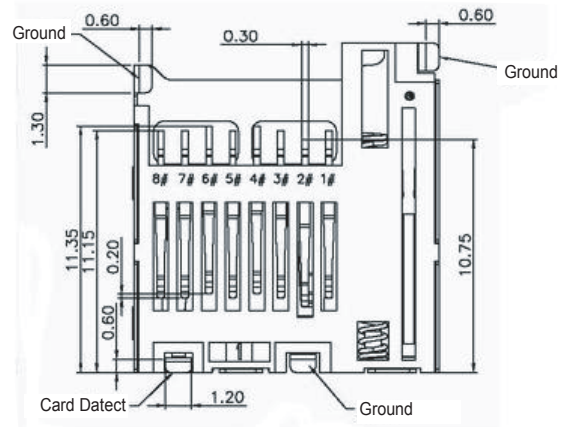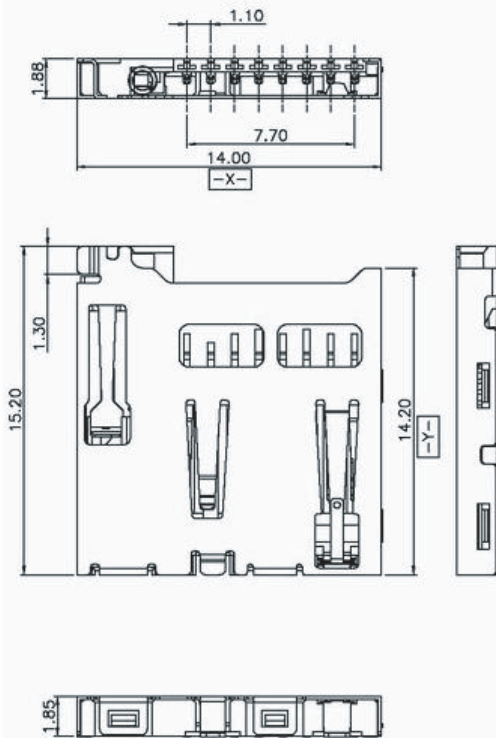

## HOW TO ORDER

SERIES NO.	CONTACT NO.	PLATING
8007	8	S
	8 9	S: SELECTIVE GOLD PLATED S1: SELECTIVE GOLD 15u" S2: SELECTIVE GOLD 30u"