


C-TEK 2 IN 1 (MS+ MS Duo Reverse)

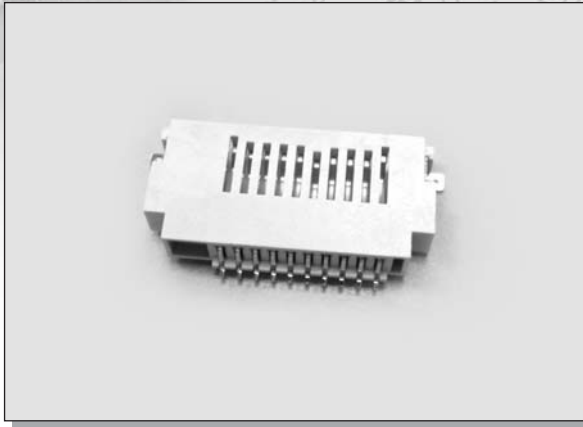

MATERIAL:

HOUSING : THERMOPLASTIC (UL 94V-0).

CONTACT : PHOSPHOR BRONZE.

SPECIFICATION:

VOLTAGE RATING : 50V DC MAX.


CURRENT RATING : 0.5A MAX.

OPERATING TEMPERATURE : -20°C ~ +80°C

INSULATION RESISTANCE : 1000 MΩ MIN.

CONTACT RESISTANCE : 100 MΩ MAX.

DIMENSIONS

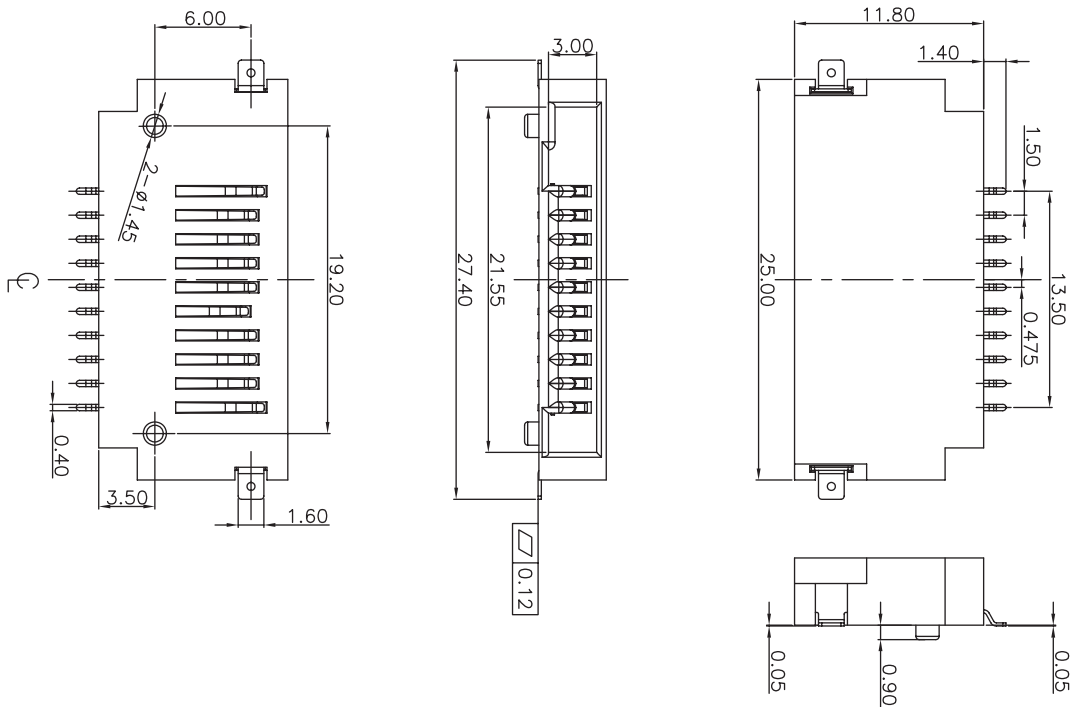

HOW TO ORDER

SERIES NO.

8008

PLATING

S

S: SELECTIVE GOLD PLATED

S1: SELECTIVE GOLD 15u"

S2: SELECTIVE GOLD 30u"