


C-TEK 6 IN 1 (MMC, SD, MINI SD, RS-MMC, RS-MMC/MMC4.0)

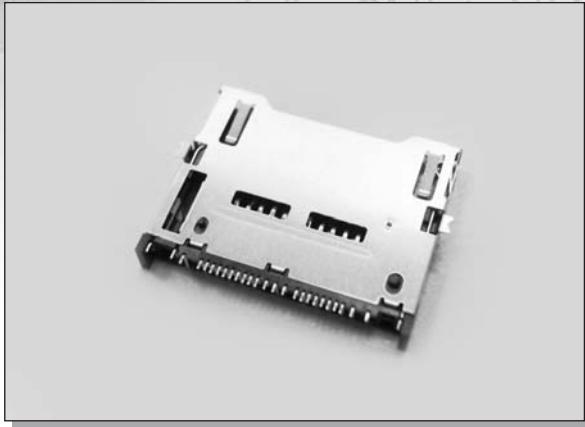


MATERIAL:

INSULATION : HI-TEMP PLASTIC UL 94V-0 RATED.
CONTACT : COPPER ALLOY.

SPECIFICATION:

VOLTAGE RATING : 50V DC MAX.
CURRENT RATING : 0.5A MAX.
OPERATING TEMPERATURE : -20°C ~ +80°C
INSULATION RESISTANCE : 1000 MΩ MIN.
CONTACT RESISTANCE : 100 MΩ MAX.

DIMENSIONS

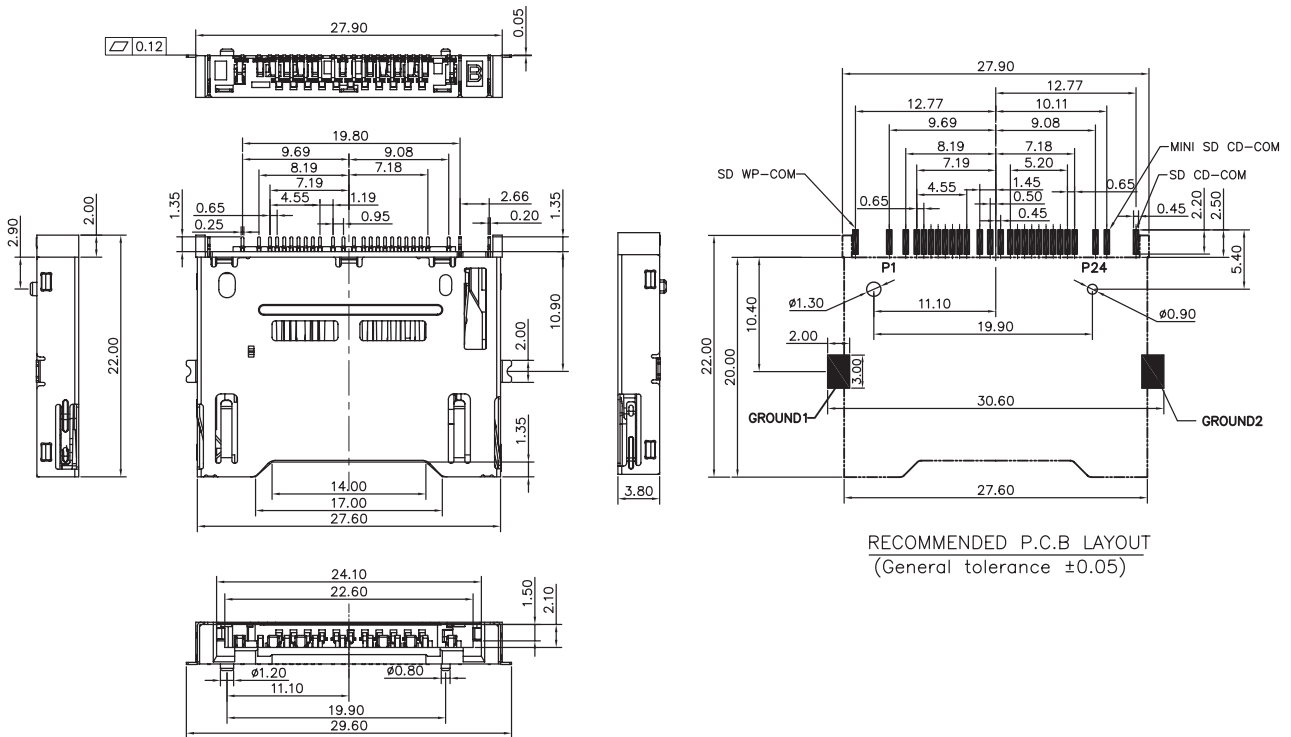

HOW TO ORDER

SERIES NO.

8009

PLATING

S

S: SELECTIVE GOLD PLATED
S1: SELECTIVE GOLD 15u"
S2: SELECTIVE GOLD 30u"