


LTR	Part Name	Material	Description	QTY
1	Housing	LCP +30%玻纖 UL94V-0	260°C for 10 Seconds, Initial : 10000M Ohms Min.	1
2	Contact	Brass C2680	Current Rating : 0.5 A Initial : 30m Ohms Max.	XX
3	Fitting Nail	Brass C2680	Current Rating : 0.5 A Initial : 30m Ohms Max.	2
4	Mylar	PI		1

Temperature Rating : -40°C ~ +105°C.
Dielectric Withstanding Voltage : 300 V A/C/Min

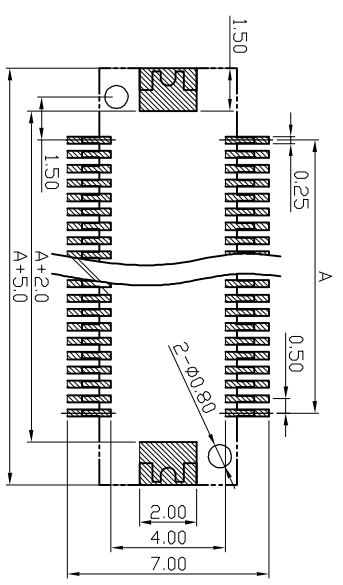

Circuit No.	Dimensions			
	A	B (A+5.0)	C (A+2.0)	D (A+3.0)
2*15P	7.00	12.00	9.00	10.00
2*20P	9.50	14.50	11.50	12.50
2*25P	12.00	17.00	14.00	15.00
2*40P	19.50	24.50	21.50	22.50

C 28 0 0 X X -09
 Number of Contact
 40,50,80 Contact
 Series No.
 MATE WITH C2800XX-10
 C2800XX-11

THIS DRAWING IS A CONTROLLED DOCUMENT.

DMN	尹曉開	01SEP2023
CHK	楊廣文	01SEP2023
APVD	林振偉	01SEP2023
PRODUCT SPEC		
QUALIFICATION TEST REPORT		
WEIGHT		
CUSTOMER DRAWING		

DIMENSIONS: MM	TOLERANCES UNLESS OTHERWISE SPECIFIED:	FINISH
0 P.L.C	± -	0 P.L.C
1 P.L.C	± 0.30	1 P.L.C
2 P.L.C	± 0.20	2 P.L.C
3 P.L.C	± 0.15	3 P.L.C
ANGLES	± - ±.3°	ANGLES

MATERIAL SEE NOTE

CHUFON TECH CO., LTD

PH0.5 BT0B H3.0母座

SIZE	QAE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C280000-09	-

SCALE: 1 OF 1 REV: A0