


LTR	Part Name	Material	Description	QTY
1	Housing	LCP UL94V-0	260°C for 10 Seconds. Initial : 1000M Ohms Min.	1
2	Contact	Bronze CS191	Current Rating : 0.5 A Initial : 30m Ohms Max.	XX

Temperature Rating : -40°C ~ +105°C.
Dielectric Withstanding Voltage : 300 V AC/Min

Circuit No.	Dimensions		
	A	B (A+1.0)	C (A+2.0)
2*10P	4.50	5.50	6.50
2*15P	7.00	8.00	9.00

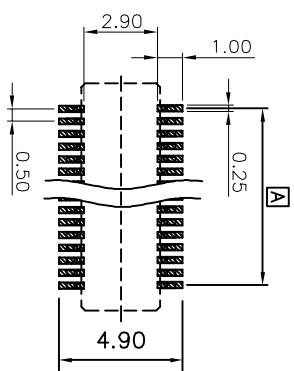

: STAND OFF AREA

P.C.B LAYOUT

C 28 0 0 X X -14

Number of Contact
20, 30 Contact

Series No.
MATE WITH C2800XX-15

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
		0 P.L.C	± -
		1 P.L.C	± 0.30
		2 P.L.C	± 0.20
		3 P.L.C	± 0.15
		ANGLES	± - ±.3°

MATERIAL SEE NOTE

FINISH SEE NOTE

DMN	尹晚開	01SEP2023
CHK	楊廣文	01SEP2023
APVD	林振偉	01SEP2023
PRODUCT SPEC		
QUALIFICATION TEST REPORT		
WEIGHT		
CUSTOMER DRAWING		

CHUFON TECH CO., LTD

PH0.5 BT0B H1.2 SERIES PIN 母座

SIZE: A3
CASE CODE: 00779
DRAWING NO: C280000-14
SCALE: —
SHEET: 1 OF 1
REV: A0

RESTRICTED TO